

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing and front frame
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

WARRANTY

- 5 Year
- 10 Year Available

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°F (-40°C) - 122°F (50°C)

OPTICAL SYSTEM

- Clear glass lenses available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI: 80
- Available in 30K, 40K, and 50K
- Types I, II, III, IV, V available

ILLUMINATION

- 175.2W LED / 187 System Watts
- 262W LED / 286 System Watts

MOUNTING

- No mounting hardware standard
- Optionally mounts with trunion, slip fitter, yoke mount, wall bracket, or pole arm mounts


CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Assembled in USA available
- Meets DLC Requirements (50K only)


ORDERING INFORMATION

CATALOG #	Lumens	Distribution	Color
AL21-Q-174L-QT-40K-T1	21,051	Type I	4000K
AL21-Q-174L-QT-50K-T1	22,575	Type I	5000K
AL21-Q-174L-QT-40K-T2	20,270	Type II	4000K
AL21-Q-174L-QT-50K-T2	21,738	Type II	5000K
AL21-Q-174L-QT-40K-T3	20,071	Type III	4000K
AL21-Q-174L-QT-50K-T3	21,524	Type III	5000K
AL21-Q-174L-QT-40K-T4	17,640	Type IV	4000K
AL21-Q-174L-QT-50K-T4	18,917	Type IV	5000K
AL21-Q-174L-QT-30K-T5	20,622	Type V	3000K
AL21-Q-174L-QT-40K-T5	21,367	Type V	4000K
AL21-Q-174L-QT-50K-T5	22,913	Type V	5000K
AL21-Q-262L-QT-40K-T1	31,698	Type I	4000K
AL21-Q-262L-QT-50K-T1	33,992	Type I	5000K
AL21-Q-262L-QT-40K-T2	30,521	Type II	4000K
AL21-Q-262L-QT-50K-T2	32,730	Type II	5000K
AL21-Q-262L-QT-40K-T3	30,221	Type III	4000K
AL21-Q-262L-QT-50K-T3	32,408	Type III	5000K
AL21-Q-262L-QT-40K-T4	26,561	Type IV	4000K
AL21-Q-262L-QT-50K-T4	28,483	Type IV	5000K
AL21-Q-262L-QT-40K-T5	32,172	Type V	4000K
AL21-Q-262L-QT-50K-T5	34,500	Type V	5000K

See second page for options/accessories

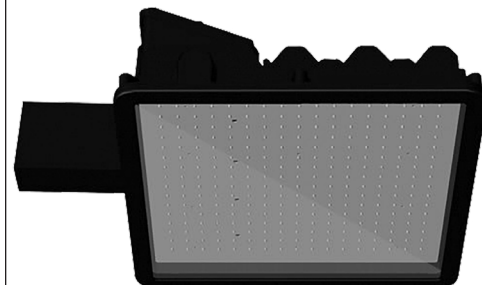

AL21-Q Square LED Area Light

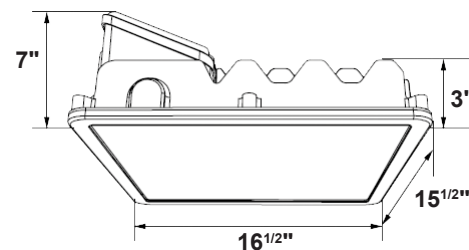

Length with Mount:

- SB: 21^{3/8}"
- SF: 22^{3/4}"
- AY: 21^{1/2}"
- AM: 21"
- WB: 17^{1/2}"

PHOTOMETRICS

OPTIONS (Factory Installed)


SF	- Slipfitter
SB	- Trunion Mount
AY	- Adjustable Yoke
MAA	- Mounting Arm Adapter (fits 2 ^{3/8"} arm)
WB	- Wall Mount Bracket
SGP	- Surge Protection
SGF	- Single Fuse
DBF	- Double Fuse
480V	- 347-480V Driver
TWL7PIN	- 7-Pin Twist Lock Photocell Receptacle
TWLPC3R	- 3-Pin Twist Lock Photocell Receptacle
10YR	- 10 Year Warranty
CC	- Custom Color
USA	- Assembled in USA

ACCESSORIES (Ships on Side)


FLEM6*	- 6" Mounting Arm
FLEM10*	- 10" Mounting Arm
FLEM12*	- 12" Mounting Arm
TWLPC1	- 110-120V Twist Lock Photocell
TWLPC2	- 105-287V Twist Lock Photocell
TWLTD1	- 120V Twist Lock Time Delay Photocell
TWLTD2	- 277V Twist Lock Time Delay Photocell
TWLNSC	- Twist Lock Non-Shorting Cap (Fixture always off)
TWLSC	- Twist Lock Non-Shorting Cap (Fixture always on)
AL21-Q-HSS	- House Side Shield
AL21-Q-WG	- Wire Guard
SPTMA	- Square Pole Tenon Adapter (Use with FLEMs)
PTB	- Single Pole Tenon Spoke Bracket
PTB2	- Twin Pole Tenon Spoke Bracket - 90° Arm
PTB2180	- Twin Pole Tenon Spoke Bracket - 180° Arm
PTB3	- Triple Pole Tenon Spoke Bracket - 90° Arm
PTB3120	- Triple Pole Tenon Spoke Bracket - 120° Arm
PTB4	- Quad Pole Tenon Spoke Bracket - 90° Arm

*Add R for Round Pole (fits 4" and 5" diameter)

AL21-Q-286L-QT-50K-T3

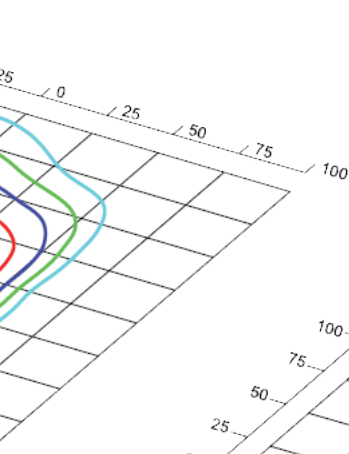

AL21-Q-286L-QT-50K-T4

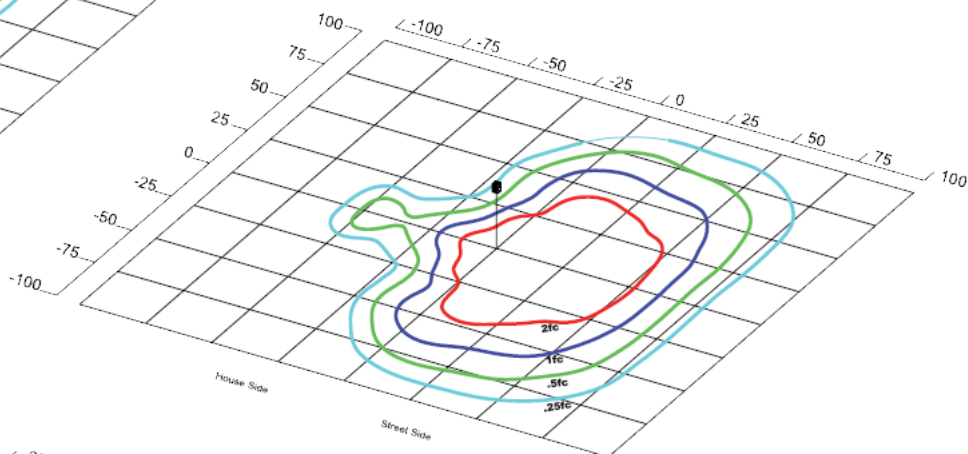

AL21-Q-262L-QT-50K-T5

