

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing and front frame
- Bronze powdercoat finish
- Integral heat sinks
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Photocell adaptable; includes receptacle and shorting cap

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°F (-40°C) - 122°F (50°C)

OPTICAL SYSTEM

- Clear glass lenses
- IC current controlled LED circuits
- 429,000 Hours @ L₇₀
- CRI: 80
- Offered in Red, Blue, Green, and Amber colors
- NEMA types 4Hx4V and 7Hx7V available

ILLUMINATION

- 78L: 78W LED; 85 System Watts

MOUNTING

- No mounting hardware standard
- Optionally mounts with trunion, slip fitter, mounting arm, wall bracket, or mounting arm adapter

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Buy American Compliant


WARRANTY

- 5 Year
- 10 Year Available



Shown with Optional Slip Fitter

AL25-QCL Small ColorLED Area Light

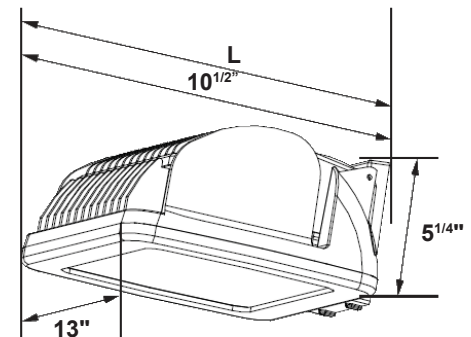

Length with Mount:

- SB: 14^{1/4}"
- SF: 14^{1/8}"
- ARM: 14^{7/8}"
- MAA: 14^{5/8}"
- WB: 11^{3/8}"
- WMB: 16^{3/8}"

ORDERING INFORMATION

CATALOG #	Wattage	NEMA Distribution	Beam Spread
AL25-QCL-78L-QT-4X430-*	78W	4HX4V	30°H x 30°V
AL25-QCL-78L-QT-7X770-*	78W	7HX7V	120°H x 70°V
AL25-QCL-78L-QT-7X710-*	78W	7HX7V	120°H x 110°V

*Specify Color: **BLue**; **GRen**; **REd**; **AMber**

See second page for options/accessories

PHOTOMETRICS

OPTIONS (Factory Installed)


SF	- Slipfitter (fits 2 ^{3/8} " tenon)
SB	- Trunion Mount
ARM	- Mounting Arm
MAA	- Mounting Arm Adapter (fits 2 ^{3/8} " arm)
WB	- Wall Mount Bracket
WMB	- Wall Mount Box (allows housing to swivel 0° - 30°) <i>Twist lock photocell not available with this mount</i>
SGP	- Surge Protection
SGF	- Single Fuse
DBF	- Double Fuse
480V	- 347-480V Driver
TWL7PIN	- 7-Pin Twist Lock Photocell Receptacle
TWL5PIN	- 5-Pin Twist Lock Photocell Receptacle
TWLPC3R	- 3-Pin Twist Lock Photocell Receptacle
10YR	- 10 Year Warranty
CC	- Custom Housing Color

ACCESSORIES (Ships on Side)

AL25-Q-RPA	- Round Pole Adapter (use with ARM only, 3-4" poles)
AL25-Q-GS	- Glare Shield
AL25-Q-WG	- Wire Guard
AL25-Q-WMA	- Wall Mount Adapter (use with ARM only)
TWLPC2	- 120-277V Twist Lock Photocell
TWLTD1	- 120V Twist Lock Time Delay Photocell
TWLTD2	- 277V Twist Lock Time Delay Photocell
TWLTD3	- 480V Twist Lock Time Delay Photocell
TWLNCS	- Twist Lock Non-Shorting Cap (Fixture always off)
TWLSC	- Twist Lock Shorting Cap (Fixture always on)
PTB	- Single Pole Tenon Spoke Bracket - 2 ^{3/4} "
PTB2	- Twin Pole Tenon Spoke Bracket - 90° Arm - 2 ^{3/4} "
PTB2180	- Twin Pole Tenon Spoke Bracket - 180° Arm - 2 ^{3/4} "
PTB3	- Triple Pole Tenon Spoke Bracket - 90° Arm - 2 ^{3/4} "
PTB3120	- Triple Pole Tenon Spoke Bracket - 120° Arm - 2 ^{3/4} "
PTB4	- Quad Pole Tenon Spoke Bracket - 90° Arm - 2 ^{3/4} "



AL25-QCL-78L-QT-7X710
Mounting Height: 20ft

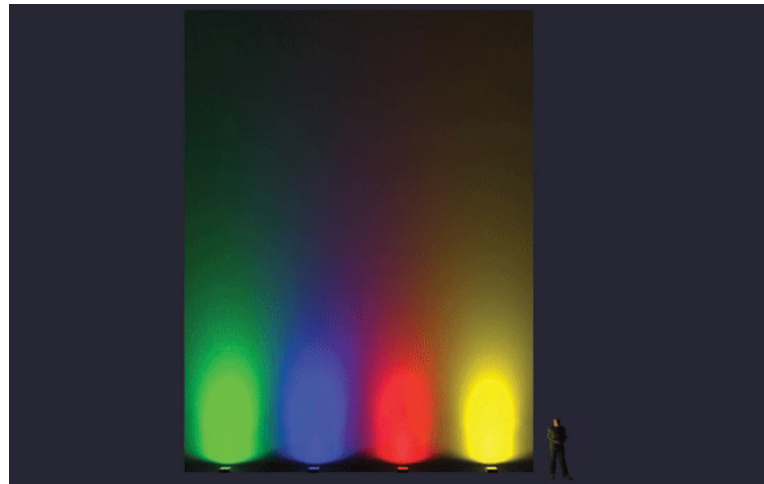

AL25-QCL-78L-QT-4X430
Mounting Height: 20ft