

SPECIFICATIONS

HIGHBAYS

HOUSING

- Die-cast aluminum housing
- Black finish housing

ELECTRICAL

- Quad Tap (QT) - 100-277V
- 1-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 65°C (150°F)
- 150,000 hours @ L₇₀

OPTICAL SYSTEM

- Diffused tempered glass lens
- Available in 3000K, 4000K, 5000K
- CRI>80
- Philip LED Chips

MOUNTING

- Yoke mounting bracket standard on 320W models, optional for others
- Hook mount standard on 100W/50/240W models, supplied with 320W

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP67 Rated
- DLC Premium listed
- FCC Qualified
- RoHS Compliant

WARRANTY

- 5 Year



HBLEDD19-T LED Highbay

ORDERING INFORMATION


MODEL#	Wattage	Driver	CCT
HBLEDD19-T	100L (15,500 Lm)	QT	30K
	150L (24,000 Lm)		40K
	240L (38,000 Lm)		50K
	320L (52,000 Lm)		

OPTIONS (Factory Installed)

DL	- Diffused Polycarbonate Lens (diffused tempered glass lens standard)
CL	- Clear Polycarbonate Lens (diffused tempered glass lens standard)
OCSM	- Occupancy Sensor
480V	- 480V Driver (replaces QT in part number)
10YR	- 10 Year Warranty

ACCESSORIES (Ships on Side)

EM40-T	- 40W External Emergency Battery
HBLEDD-T-PA	- Pendant Adapter
HBLEDD-T-YMS	- Yoke Mounting Bracket (100W/150W Models)
HBLEDD-T-YML	- Yoke Mounting Bracket (240W Models)

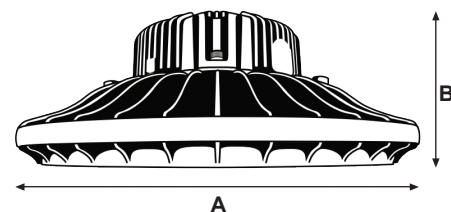

Model	A	B	Weight
100W	13.2"	6.7"	11.7 lbs
150W	13.2"	6.7"	12.6 lbs
240W	17.0"	6.7"	19.8 lbs
320W	17.0"	6.7"	21.6 lbs

LUMEN INFORMATION

Catalog #	100W			150W			240W			320W		
HBLED19-T	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
		15,320 Lm	15,900 Lm	16,300 Lm	23,560 Lm	24,168 Lm	24,776 Lm	37,200 Lm	38,160 Lm	39,120 Lm	51,818 Lm	52,480 Lm

MOUNTING

