

SPECIFICATIONS

HIGHBAYS

HOUSING

- Die-cast aluminum housing
- Black finish housing

ELECTRICAL

- Quad Tap (QT) - 100-277V
- 1-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 65°C (150°F)
- 150,000 hours @ L₇₀

OPTICAL SYSTEM

- Polycarbonate lens
- Available in 3000K, 4000K, 5000K
- CRI>80
- Philip LED Chips

MOUNTING

- Ring hook mount standard

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP67 Rated
- DLC Premium listed
- FCC Qualified
- RoHS Compliant

WARRANTY

- 5 Year



HBLED52-T LED Highbay


ORDERING INFORMATION

CATALOG #	Wattage	Lumens
HBLED52-T-100L-QT-*	100W	15,320 - 16,300 Lm
HBLED52-T-150L-QT-*	150W	23,560 - 24,776 Lm
HBLED52-T-240L-QT-*	240W	37,200 - 39,120 Lm

*Specify CCT: 30K, 40K, 50K

ACCESSORIES (Ships on Side)

EM40-T	- 40W External Emergency Battery
OCSM-T	- Scree-in Occupancy Sensor
REM-T	- Remote for Sensor
HBLED-T-PA	- Pendant Adapter

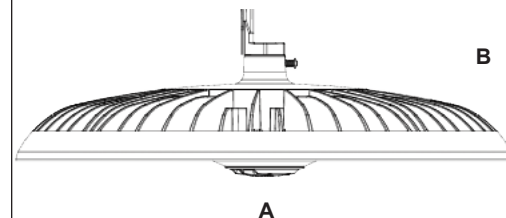

Model	Diam.	Height	Weight (lbs)
100W	11.5"	5"	5.5lbs
150W	13.5"	5"	7lbs
240W	15.5"	5"	9lbs