

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum housing
- Dark bronze powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 347-480V available
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 55°C (131°F) - 200W/300W
- Operating Temperature: -40°C (-40°F) - 65°C (149°F) - 250W/340W
- 130,000 hours @ L₇₀
- 4kV Surge Protection

OPTICAL SYSTEM

- Adjustable dial is optional for wattage dimming
 - 200W can be adjusted to 250W
 - 300W can be adjusted to 340W
- 4000K / 5000K
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>70

MOUNTING

- 3/4" Conduit pendant or mounting hook

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Premium Approved

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG #	Wattage	Lumens
HBLED54-F-200L-QT-*	200W	32,500 Lm
HBLED54-F-250L-QT-*	250W	40,000 Lm
HBLED54-F-300L-QT-*	300W	49,000 Lm
HBLED54-F-340L-QT-*	340W	55,500 Lm


Specify CCT: 40K, 50K

OPTIONS (Factory Installed)

ADJ	- Adjustable Dial (for 200W and 300W models)
OCS	- Motion Sensor
SGP	- Surge Protection
BK	- Black Housing
WH	- White Housing
480V	- 347-480V (replaces QT in part number)



HBLED54-F Wattage Selectable Highbay

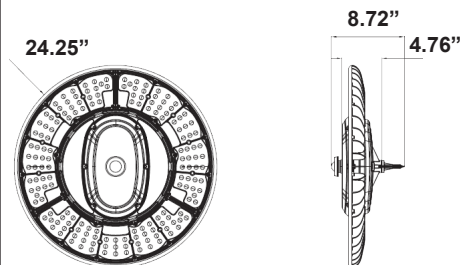

200W / 250W: 16.27lbs
300W / 340W: 17.57lbs