

SPECIFICATIONS

HIGHBAYS

HOUSING

- Heavy duty diecast aluminum housing
- Offered in black and white finishes

ELECTRICAL

- Quad Tap (QT) - 120-277VAC
- 277-480V optional
- 0-10V Dimmable driver standard
- Power Factor > .90
- THD <20%
- Operating Temperature: -40°C - 45°C (-40°F - 113°F)

OPTICAL SYSTEM

- Clear acrylic Lens
- MCT (switchable between 35K/40K/50K)
- 130Lm/W
- Beam Angle: 110°
- CRI > 80
- 70,000 hours @ L₇₀

MOUNTING

- 10' Whip included
- Clip on eye hook included
- Pendant mount and surface mount brackets also available

CODE COMPLIANCE

- cULus Listed for Damp Locations
- DLC Premium Listed
- NSF Listed
- RoHS Compliant
- CA T24 Approved
- FCC Listed

WARRANTY


- 5 Year




HBLED58-EN

Wattage and Color Selectable NSF Highbay

HBLED58-EN-1L

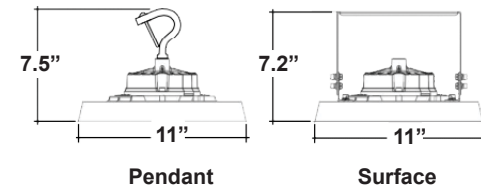

HBLED58-EN-2L

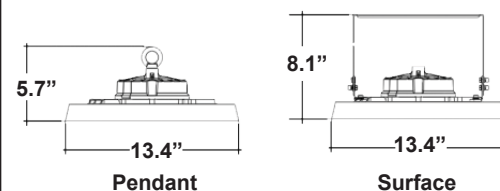

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
HBLED58-EN-1L-QT-MCT	60W / 100W / 150W	7,800 - 19,500 Lm	35K/40K/50K
HBLED58-EN-2L-QT-MCT	180W / 210W / 240W	23,400 - 31,200 Lm	35K/40K/50K

Options/Accessories on 2nd Page

OPTIONS / ACCESSORIES

Options (Factory Installed)

WH	- White Housing (black standard)
480V	- 277-480V Driver
EM	- Emergency Battery
EMS	- Emergency Battery Surface Mount
SGP	- 20kV Surge Protection (6kV standard)

Accessories (Order Separately)

HB01DMS-A	- Bi-Level Motion and Daylight Sensor
REM1-EN	- Remote for Sensor
EM30W-EN-PM	- 30W Pendant Emergency Battery
TBC-EN	- Test Button Controller
HBLED58-EN-AR1	- Aluminum Reflector for 1L model
HBLED58-EN-AR2	- Aluminum Reflector for 2L model
HBLED58-EN-AC1	- Acrylic Reflector for 1L model
HBLED58-EN-AC2	- Acrylic Reflector for 2L model
HBLED58-EN-ACBC	- Bottom Cover for Acrylic Reflectors
HBLED58-EN-WG1	- Wireguard for 1L model (not compatible with reflectors)
HBLED58-EN-WG2	- Wireguard for 2L model (not compatible with reflectors)
HBLED58-EN-MB1	- Surface Mounting Bracket for 1L model
HBLED58-EN-MB2	- Surface Mounting Bracket for 2L model
HBLED58-EN-PM	- 1/2" Pendant Mount

