

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Die cast gasketed aluminum housing and front frame
- Integral heat sinks
- Powdercoat bronze finish standard
- Corrosion resistant housing and hardware
- OxyShield multi-stage anti-oxidation process
- Silicone rubber gasket

### ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)

### OPTICAL SYSTEM

- Tempered Clear Glass Lens
- IC current controlled LED circuits
- 89,000 Hours @ L<sub>70</sub>
- CRI: 80

### MOUNTING

- Threaded pipe (NPS 1/2") which attaches to a junction box is standard
- Can be ground mounted or up to heights of 12'

### CODE COMPLIANCE


- cULus Listed for Wet Locations
- IP66 Rated

### WARRANTY

- 5 Year



**LD4-QCL**  
**ColorLED Bullet**  
**Flood Light**

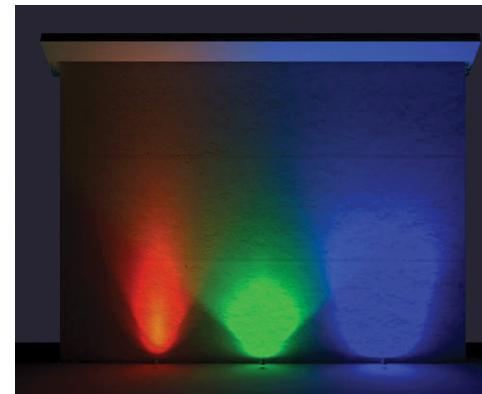

4X425    6X670    6X610

## ORDERING INFORMATION

CATALOG#	Wattage	Beam Spread
LD4-QCL-21L-QT-6X670-*	21W	NEMA 6H x 6V, 70°H x 70°V
LD4-QCL-21L-QT-6X610-*	21W	NEMA 6H x 6V, 100°H x 100°V
LD4-QCL-21L-QT-4X425-*	21W	NEMA 4H x 4V, 25°H x 25°V

\*Specify CCT: **BLue**, **GReen**, **REd**, **AMber**

### OPTIONS (Factory Installed)

SGF	- Single Fusing
DBF	- Double Fusing
SGP	- Surge Protection

### ACCESSORIES (Order Separately, Ships on Side)

LD4-Q-STK	- Ground Stake
LD4-Q-PTF	- Post Top Fitter
LD4-Q-SHD	- Shroud

