

SPECIFICATIONS

MULTI-FAMILY

MATERIAL

- Rectangular backlit-projecting, front-lit mirror
- 44" W x 36" H (**mounts only one way, W X H**)
- 5mm polished glass, copper free
- Anodized aluminum frame, SS screws
- Switch provided

DIMENSIONS

- Frame Depth: 1.50"
- Frame Perimeter: 1.0" inside of mirror perimeter
- Inner frame perimeter approx 5.75" inside mirror perimeter
- Top mounting bar: 7.50" from top edge
- Frosted area 2"
- Mirrored area outside of frosted glass 2" wide

MOUNTING

- Frame has 4 integrated aluminum mounting brackets attached to the frame used to secure the frame to the wall.
- (4) Heavy duty screw-in wall anchors are included.
- (2) Mounting brackets installed on the rear of the mirror that slide into the cross-bars on the aluminum frame, allowing the mirror to be mounted after the frame has been installed

ILLUMINATION

- LED Strip: 40 LEDs per ft
- 8,800 Lumens
- 50,000 hours life expectancy
- 43.9W
- 6000K standard
- CRI: 92

ELECTRICAL


- 100-240VAC Input
- 12VDC Output

CODE COMPLIANCE

- cETLus Listed
- Conforms to UL962 standards
- Certified to cSA standards

WARRANTY

- 5 Years

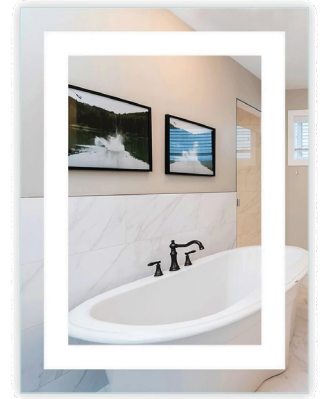

MM28 LED Mirror

ORDERING INFORMATION

CATALOG

MM28-44L-QT-60K