

## SPECIFICATIONS

INDOOR

### HOUSING

- 4" and 6" Modules
- Aluminum housing
- Easy installation in new construction or retrofit applications
- Type non-IC access above ceiling required

### ELECTRICAL

- Triac Dimmable
- 120V
- 60Hz
- Power Factor > 0.90

### ILLUMINATION

- 5CT - Selectable between 27K/30K/35K/40K/50K
- 119,000 Hours @ L<sub>70</sub>
- CRI > 90

### CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Energy Star Rated
- FCC Part 15, class A Compliant



### WARRANTY

- 5 Year warranty



## RCAN-PA2-5CT

### Selectable LED Downlight Module

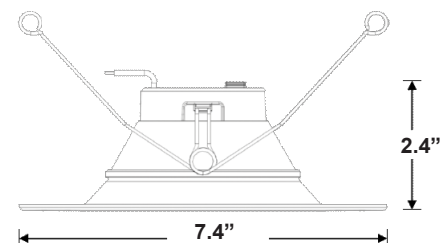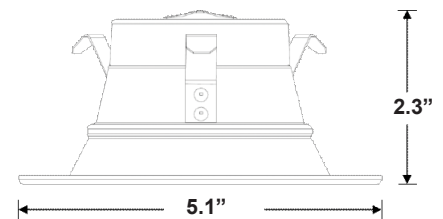

## ORDERING INFORMATION

CATALOG#	Size	Lumens	CCT
RCAN4-PA2-1L-120V-5CT	4"	700 Lumens	27K/ 30K/ 35K/ 40K/ 50K
RCAN6-PA2-1L-120V-5CT	6"	1000 Lumens	27K/ 30K/ 35K/ 40K/ 50K