

SPECIFICATIONS

INDOOR

FEATURES

- The SDL series is an economical lighting solution for low to mid volume loading docks.
- The arm features a hinge that allows both vertical and horizontal adjustments.
- Twin-axis hinge allows arm to deflect when struck by doors or lift trucks.
- Durable design and construction reduces maintenance cost
- Lamp Cover included

HEAD STYLES

- See second page for details

ELECTRICAL

- Arm Plug: NEMA 5-15P
- Arm Socket: IEC C-14
- Head Plug: IEC C-13
- AC Voltage: 115V

CODE COMPLIANCE

- cULus Listed
- Assembled in USA

WARRANTY

- 5 Year
- 10 Year Available




SDL Single Strut Swing Arm and Dock Light

ORDERING INFORMATION

| MODEL | Arm Length | Head |
|-------|------------|----------|
| SDL | 24" | HDLED |
| | 40" | PLED |
| | 60" | PL1 |
| | | ML1 |
| | | P |
| | | HPS-P |
| | | HPS-P-FS |

ACCESSORIES (Order Separately, Ship on Side)

| | |
|-------------|--|
| SDL-ARM* | - Arm Only (*specify length in inches) |
| TL-HDLED | - HDLED Head Only |
| TL-PLED | - PLED Head Only |
| TL-PL1 | - PL1 Head Only |
| TL-ML1 | - ML1 Head Only |
| TL-P | - P Head Only |
| TL-HPS-P | - HPS-P Head Only |
| TL-HPS-P-FS | - HPS-P-FS Head Only |
| TL-TRIPOD | - Adjustable Tripod |

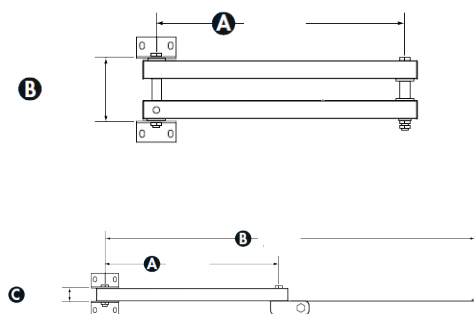

| Model | A | B | C |
|-------|-------|-------|-------|
| SDL24 | 24.0" | 5" | N/A |
| SDL40 | 19.5" | 43.5" | 1.75" |
| SDL60 | 31" | 61.0" | 8.25" |

HEAD STYLES

HDLED: Heavy Duty Cast Aluminium LED Module Head

- 915 Lumens
- Uses 17.5W
- 60,000+ lamp life
- IP66 Rated; dust tight, wet and damp location
- Shatterproof polycarbonate lens cover
- Ideal for food service applications
- Units available for 120V, 240V, and low voltage applications

ML1: Metal LED Module Head

- 679 Lumens
- Uses 14W
- Units available for 120V, and low voltage applications

PL1: Polycarbonate LED Module Head

- 903 Lumens
- Uses 15.5W
- Ideal for refrigerated and food service applications
- Units available for 120V, 240V, and low voltage applications

PLED: Polycarbonate LED PAR38 Bulb Head

- 850 Lumens
- Ideal for refrigerated and food service applications
- Wire Guard included
- Units available for 120V, 240V, and low voltage applications

P: Polycarbonate Incandescent PAR38 Bulb Head

- Lamp not included
- Ideal for refrigerated and food service applications
- Wire guard included
- Can handle incandescent, or halogen bulb (up to 150W)
- Units available for 120V, 240V, and low voltage applications

M: Metal Incandescent PAR38 Bulb Head

- Lamp not included
- Wire guard included
- Can handle incandescent, or halogen bulb (up to 300W)
- Units available for 120V, and low voltage applications

HPS-P: Polycarbonate High Pressure Sodium Bulb Head

- 50W HPS Lamp included
- 4,000 Lumens
- Units available for 120V, 277V, and low voltage applications

HPS-P-FS: Polycarbonate High Pressure Sodium Bulb Head - Food Service

- 50W HPS Lamp included
- 4,000 Lumens
- Clear polycarbonate lens with diffuser for food service
- Units available for 120V, 277V, and low voltage applications

TL-TRIPOD

- Height Adjusts from 40-72"
- Legs open to 42" diameter for stability
- Folded height is 40"
- Can be used with all lamp heads