

SPECIFICATIONS

INDOOR

HOUSING

- Steel housing
- White finish
- Easy installation in new and retrofit applications

ELECTRICAL

- 120V
- Triac Dimming

OPTICAL SYSTEM

- Polystyrene plastic lens
- 4" Fixture: 9W, 660 Lumens
- 6" Fixture: 13W, 1000 Lumens
- MCT Field selectable colote temperature, 27000K - 50000K
- 137,000 Hours @ L₇₀

CODE COMPLIANCE

- cULus Listed for Wet Locations
- Energy Star Rated
- FCC Compliant


WARRANTY

- 5 Years



VLDLP1-MCT

4" & 6" Thin Color Selectable Downlight

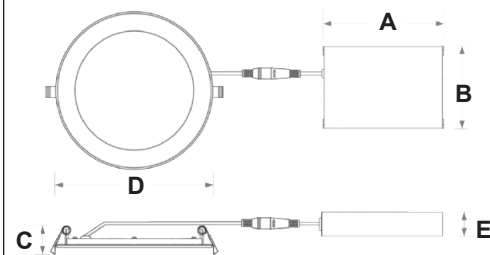

	A	B	C	D	E
VLDLP1-4	4.5"	3.0"	0.5"	4.7"	1.3"
VLDLP1-6	4.5"	3.0"	0.5"	6.8"	1.3"

ORDERING INFORMATION

CATALOG#

VLDLP1-4-9L-120V-MCT

VLDLP1-6-13L-120V-MCT