

SPECIFICATIONS

INDOOR

HOUSING

- Aluminum housing
- Recessed ceiling, new construction or retrofit
- No recessed housing required for installation
- Access above ceiling required
- Covered ceilings only

ELECTRICAL

- 120V
- Triac Dimmable
- 0.5kV Surge Protection
- Operating Temperature: -20°C - 45°C (-4°F - 113°F)
- PF > 0.90
- 139,000 hours @ L₇₀

OPTICAL SYSTEM

- 5CT (Selectable between 27K/30K/35K/40K/50K)
- CRI ≥ 90
- Beam Angle: 110°

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL Requirements
- FCC Part 15, Class B


WARRANTY

- 5 Year



VLDLP2-5CT

Color Selectable Flat Panel Downlight

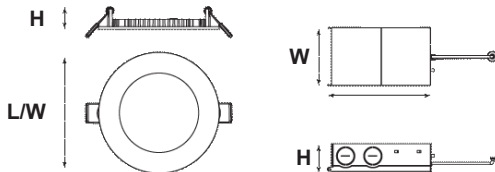

Model #	L	W	H	Weight	JBox Size (LxWxH)
VLDLP2-3-6L	3.62"	3.62"	0.85"	0.44 lbs	3.94" x 2.68" x 1.40"
VLDLP2-4-7L	4.74"	4.74"	0.79"	0.63" lbs	4.73" x 2.77" x 1.34"
VLDLP2-6-15L	6.73"	6.73"	0.79"	0.88" lbs	4.73" x 2.77" x 1.34"
VLDLP2-8-18L	8.82"	8.82"	0.93"	1.10" lbs	4.73" x 2.77" x 1.34"

ORDERING INFORMATION

CATALOG#	Size	Lumens	Wattage	Color
VLDLP2-3-6L-120V-5CT	3"	400 Lumens	6W	27K/30K/35K/40K/50K
VLDLP2-4-7L-120V-5CT	4"	600 Lumens	7W	27K/30K/35K/40K/50K
VLDLP2-6-15L-120V-5CT	6"	1,000 Lumens	15W	27K/30K/35K/40K/50K
VLDLP2-8-18L-120V-5CT	8"	1,400 Lumens	18W	27K/30K/35K/40K/50K