

**SPECIFICATIONS**

INDOOR

**HOUSING**

- Aluminum housing
- Compatible with 4.35" / 6.30" / 8.10" ceiling cut-outs
- Easy installation in new construction or retrofit applications
- Type IC. Access above ceiling required. Covered ceiling mount only.

**ELECTRICAL**

- Universal 120-277Vac
- 0-10V Dimmable
- Max. Operating Temperature: -45°C (113°F)
- 149,000 hours

**OPTICAL SYSTEM**

- White translucent acrylic lens
- 5CT (Selectable between 27K/30K/35K/40K/50K)
- High quality heat sinks for temperature control
- 4" Housing (500/800/1000 Lumens)
- 6" Housing (1000/1500/2000 Lumens)
- 8" Housing (3000/4000/5000 Lumens)
- IC current controlled LED circuits
- CRI<sub>≥</sub>90

**CODE COMPLIANCE**

- cETLus Listed for Wet Locations
- Energy Star Certified
- FCC Part 15, Class B


**WARRANTY**

- 5 Year



## VLRCAN6-B-MCT

### Color Selectable Downlight

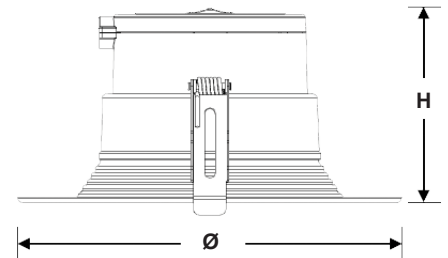

**ORDERING INFORMATION**

CATALOG#	Size	Lumens	Driver	CCT	Color
VLRCAN6-B	4	1L	QT	MCT	WH
	6				SW*
	8				

*\*Not available on 8" models*

Size	Ø	H	Weight
4"	5.1"	3.2"	0.7 lbs
6"	8.4"	4.2"	1.4 lbs
8"	10"	4.5"	1.4 lbs