

SPECIFICATIONS

INDOOR

HOUSING

- Heavy duty die cast aluminum housing
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Tempered clear glass globe
- Repaintable textured gray powdercoat finish
- Surface and Wall mount fixtures include weatherproof box with coin plugs
- 3/4" NPT threaded mounts
- Includes reducer bushing to 1/2"

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard

OPTICAL SYSTEM

- 135,000 Hours @ L₇₀
- CRI >80
- Type V
- 4000K and 5000K available

WATTAGE

- LED: 10W
- System Input: 12.7W

MOUNTING

- Mounts on electrical box (S), pendant mount (P), or wall (W)

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated

WARRANTY

- 5 Year
- 10 Year available

ORDERING INFORMATION

CATALOG #	Lumens	Color	Mount
VP3-Q-P-10L-QT-40K	803 Lumens	4000K	Pendant
VP3-Q-P-10L-QT-50K	836 Lumens	5000K	Pendant
VP3-Q-S-10L-QT-40K	803 Lumens	4000K	J-Box
VP3-Q-S-10L-QT-50K	836 Lumens	5000K	J-Box
VP3-Q-W-10L-QT-40K	803 Lumens	4000K	Wall
VP3-Q-W-10L-QT-50K	836 Lumens	5000K	Wall

OPTIONS (Factory Installed)


SGF	-	Single Fusing
DBF	-	Double Fusing
CC	-	Custom Color
10YR	-	10 Year Warranty

OPTIONS (Factory Installed)


VP3-Q-FGG	-	Frosted Glass Globe (clear standard)
VP3-Q-VPA	-	Angled Stamped Aluminum Shade
VP3-Q-SPR	-	Swivel Pendant Mount, Round (fits 3/4" conduit)
VP3-Q-SPS	-	Swivel Pendant Mount, Square (fits 3/4" conduit)



VP3-Q LED Vapor Proof Jelly Jar

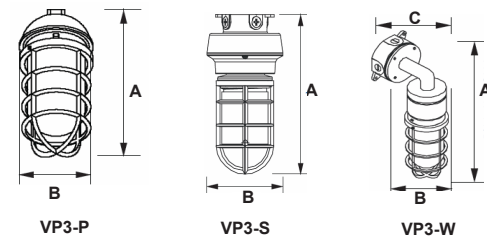

MODEL	A	B	C
VP3-P	14.75"	7.15"	-
VP3-S	15.00"	7.15"	-
VP3-W	18.25"	7.15"	7.88"

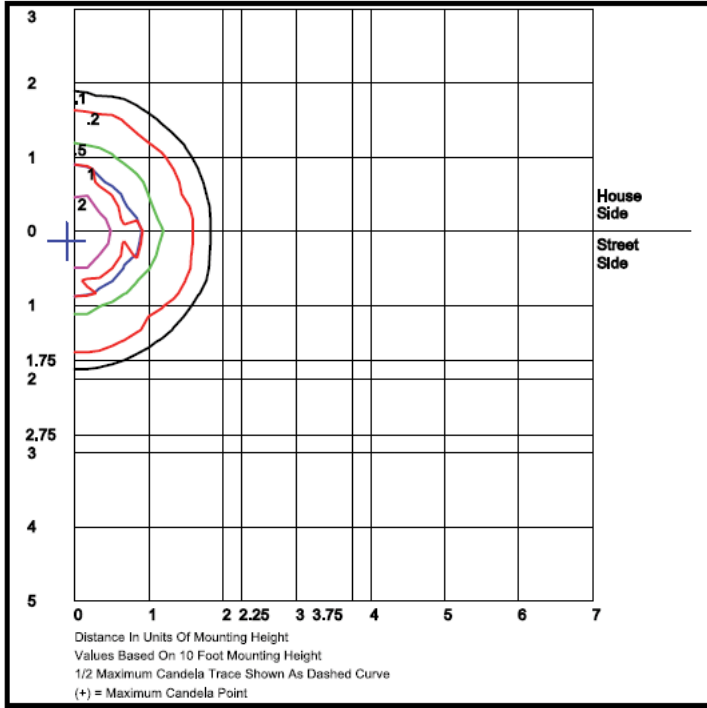

4000K B U G
 0 2 0

5000K B U G
 0 2 0

VP3-Q-P-10L-QT-50K
10' Mounting Height