

**SPECIFICATIONS**

**HOUSING**

- Heavy duty die cast aluminum housing
- White powdercoat finish standard

**ELECTRICAL**

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable driver standard
- 347-480V available
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)
- 219,000 hours @ L<sub>70</sub>

**OPTICAL SYSTEM**

- Acrylic Optical lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI: 80
- 3000K, 4000K, and 5000K available

**MOUNTING**

- Recessed Ceiling

**CODE COMPLIANCE**

- cSAus Listed for Covered Locations
- Meets UL Requirements
- IP54 Rated

**WARRANTY**

- 5 Year




## VR21-Q LED Recessed Canopy


**ORDERING INFORMATION**

CATALOG #	Wattage	Lumens	Color
VR21-Q-30L-QT-30K	30W	4,590 Lumens	3000K
VR21-Q-30L-QT-40K	30W	4,776 Lumens	4000K
VR21-Q-37L-QT-40K	37W	5,890 Lumens	4000K
VR21-Q-48L-QT-40K	48W	7,642 Lumens	4000K
VR21-Q-48L-QT-50K	48W	7,939 Lumens	5000K
VR21-Q-65L-QT-50K	65W	10,348 Lumens	5000K

**OPTIONS (Factory Installed)**

EM	- Battery Backup (QT models only)
EMCW	- Colw Weather Battery Backup, -20°C (QT models only)
SGF	- Single Fusing (QT models only)
DBF	- Double Fusing (QT models only)
SGP	- Surge Protection
480V	- 347-480V (30 and 37W only)
10YR	- Ten Year Warranty

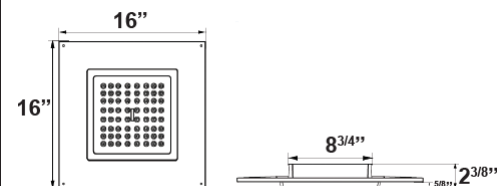

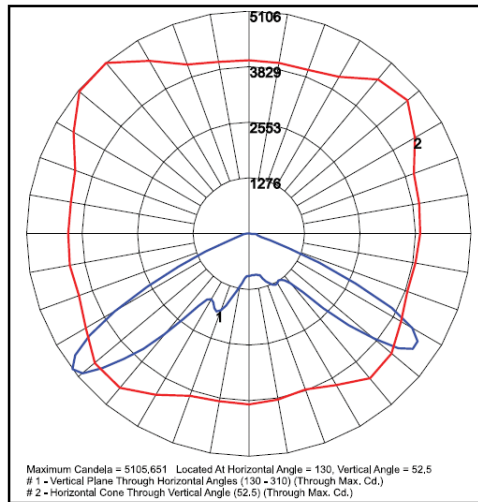

PROJECTED LUMEN MAINTENANCE

TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 55W	1.00	0.97	0.93	0.86	219,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.96	0.91	0.82	114,000
L70 Lumen Maintenance @ 40°C / 104°F		1.00	0.95	0.89	0.78	93,000