

SPECIFICATIONS

OUTDOOR

HOUSING

- Die cast aluminum housing
- 1/2" Coin plugs for conduit and photocell on two sides and back
- Nickel-plated stainless steel hardware
- Bronze powdercoat finish

OPTICAL SYSTEM

- Opal polycarbonate vandal-resistant lens
- Offered in 4000K and 5000K
- Operating Temperature: -40°C - 40°C (-40°F - 104°F)
- Type V
- L₇₀ @ 169,000 Hours

ELECTRICAL

- Quad Tap (120-277VAC)
- 0-10V dimmable driver standard

MOUNTING

- Mounts over 4" recessed Jbox, or use 1/2" surface conduit

CODE COMPLIANCE

- cSAus Lusted for Wet Locations
- Meets UL Requirements
- IP66 Rated

WARRANTY

- 5 Year
- 10 Year available




**VR22-Q
LED Canopy**



ORDERING INFORMATION

| MODEL# | Wattage | Lumens | Color |
|-------------------|---------|--------------|-------|
| VR22-Q-23L-QT-40K | 23W | 2,774 Lumens | 4000K |
| VR22-Q-23L-QT-50K | 23W | 2,890 Lumens | 5000K |

OPTIONS (Factory Installed)

| | | |
|-------|---|----------------------------|
| EBLED | - | Integral Emergency Ballast |
| 30K | - | 3000K (special order) |
| PC1 | - | 120V Photocell |
| PC3 | - | 120-277V Photocell |
| SGF | - | Single Fuse |
| DBF | - | Double Fuse |
| CC | - | Custom Color |
| 10YR | - | 10 Year Warranty |

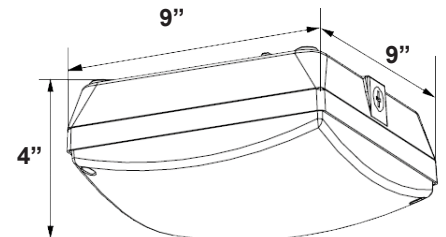

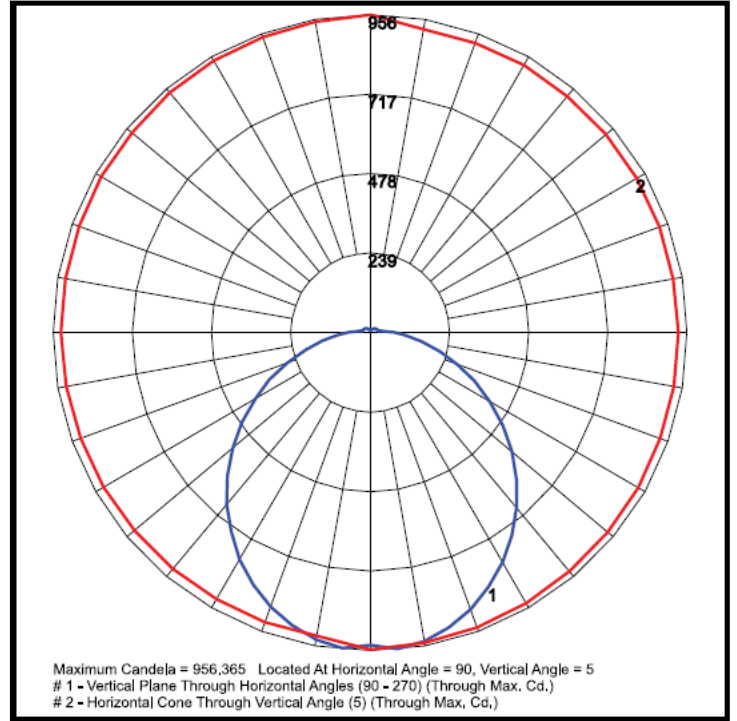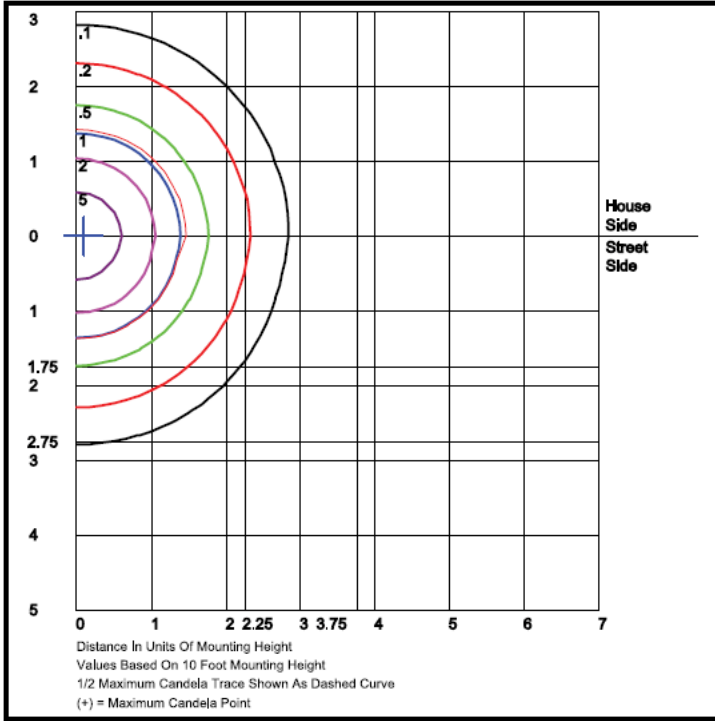

VR22-Q-23L-QT-50K