

SPECIFICATIONS

INDOOR

HOUSING

- One-piece compression-molded polyester fiberglass housing
- Continuous poured in-place gasket
- Water tight hub for 1/2" conduit entry provided
- Impact resistant diffuser acrylic diffuser held with positive cam latches
- Stainless steel latches also available
- Dirt and moisture resistant

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL Requirements
- IP65, IP66, IP67
- NEMA4X rated
- NSF Rated
- ARRA and BAA compliant
- DLC Listed

ELECTRICAL

- Electronic, QUAD Tap (QT) 120-277V ballast
- 0-10V Dimming Standard
- 347-480V driver available
- -30°C(-22°F) - 46°C(115°F)

WARRANTY

- 5 Year
- 10 Year Available

OPTICAL SYSTEM

- Ribbed and Smooth lenses available in polycarbonate and acrylic
- Standard and Wide (angled) Distribution
- 93,000 hrs @L₇₀

MOUNTING

- Various mounting brackets available



VT8 LED Vapor Tight

CATALOG#	Size	Wattage/Lumens
VT8--2X24L-QT-#*	2'	24W, 2,700 Lumens
VT8--2X28L-QT-#*	2'	28W, 3,300 Lumens
VT8--2X30L-QT-#*	2'	30W, 3,535 Lumens
VT8--2X35L-QT-#*	2'	35W, 4,200 Lumens
VT8--4X23L-QT-#*	4'	23W, 3,160 Lumens
VT8--4X32L-QT-#*	4'	32W, 4,090 Lumens
VT8--4X35L-QT-#*	4'	35W, 4,500 Lumens
VT8--4X48L-QT-#*	4'	48W, 5,570 Lumens
VT8--4X57L-QT-#*	4'	57W, 6,790 Lumens
VT8--4X72L-QT-#*	4'	72W, 8,500 Lumens
VT8--4X84L-QT-#*	4'	84W, 10,000 Lumens
VT8--8X48L-QT-#*	8'	48W, 5,570 Lumens
VT8--8X57L-QT-#*	8'	57W, 5,570 Lumens
VT8--8X70L-QT-#*	8'	70W, 9,000 Lumens
VT8--8X97L-QT-#*	8'	97W, 11,140 Lumens
VT8--8X114L-QT-#*	8'	114W, 13,580 Lumens
VT8--8X144L-QT-#*	8'	144W, 17,000 Lumens
VT8--8X168L-QT-#*	8'	168W, 20,000 Lumens

+Add 'WD' for Wide Distribution (great for parking garage applications)

#Specify Lens - **RFA**-Ribbed Frosted Acrylic; **RCA**-Ribbed Clear Acrylic;


RFP-Ribbed Frosted Polycarbonate; **RCP**-Ribbed Clear Polycarbonate;

SFAD-Smooth Frosted Acrylic Deep; **SCAD**-Smooth Clear Acrylic Deep;


SFAS-Smooth Frosted Acrylic Shallow; **SCAS**-Smooth Clear Acrylic Shallow;

SFPS-Smooth Frosted Polycarbonate Shallow; **SCPS**-Smooth Clear Polycarbonate Shallow;


*Specify Color Temperature - 30K, 35K, 40K, 50K

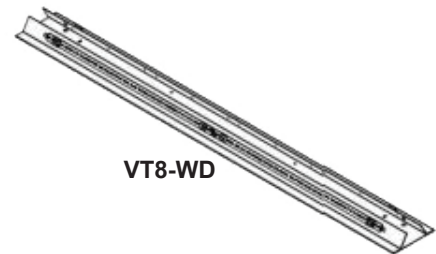

VT8-WD

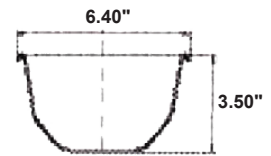

SF Lens
SC Lens

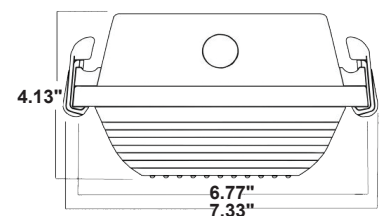

RF Lens
RC Lens

See 2nd Page for Options and Accessories

OPTIONS (Factory Installed)

EBLED4W	- Emergency Ballast (4W, 450 Lumens)
EBLED5W	- Emergency Ballast (5W, 650 Lumens)
EBLED10W	- Emergency Ballast (10W, 1300 Lumens)
480V	- 347-480V Driver
WP6	- 6' 3-Wire Whip
CS6	- 6' 3-Wire Cordset
OCS	- Occupancy Sensor
MOCS	- Integral Microwave Occupancy Sensor
OCSD	- Occupancy Sensor with Dimming
OCSCW	- Cold Weather Occupancy Sensor
OCSWL	- Wet Location Occupancy Sensor
PC1	- 120V Photocell
PC2	- 277V Photocell
SSL	- Stainless Steel Latches
10YR	- 10 Year Warranty

ACCESSORIES (Order Separately, Ship on Side)

VT8-SSMB	- Stainless Steel Mounting Bracket
VT8-SSMB-B	- Stainless Steel Mounting Bracket with Bail (recommended for cable hanging)