

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Aluminum housing and steel back plate
- Oil-Rubbed Bronze Finish

### ELECTRICAL

- 120V
- THD  $\leq$  20%
- Power Factor  $>$ .90
- Operating Temperature: 50°F -113°F (10°C - 45°C)

### ILLUMINATION

- Acrylic PC Lens
- Wattage Selectable: 12W/14W/16W (S Models) or 18W/20W/22W (L Models)
- 1200/1400/1600 Lumens (S Models) or 1800/2000/2200 Lumens (L Models)
- Color Selectable: 3000K/4000K/5000K
- CRI  $\geq$ 80
- 70,000 hours @L<sub>70</sub>
- Beam Angle: 120°

### CODE COMPLIANCE

- cETLus listed for Wet Locations
- IP66

### WARRANTY

- 5 Year



WSC13-W-S



WSC13-W-L

## WSC13-W Wattage and Color Selectable LED Wall

## ORDERING INFORMATION

| MODEL #               | Description                                  |
|-----------------------|--|
| WSC13-W-S-1L-120V-MCT | 12W/14W/16W, 1200/1400/1600 lms, 30K/40K/50K |
| WSC13-W-L-1L-120V-MCT | 18W/20W/22W, 1800/2000/2200 lms, 30K/40K/50K |

### OPTIONS (Factory Installed)

|       |   |
|-------|---|
| EM    | - Emergency Backup Battery              |
| PC    | - Button Photocell                      |
| OSCBZ | - Bronze Programmable Microwave BLLevel |
| OSCGY | - Gray Programmable Microwave BLLevel   |



EM




PC




WSC13-RC

### ACCESSORIES (Ships on Side)




|          |                  |
|----------|------------------|
| WSC13-RC | - Remote Control |
|----------|------------------|






WSC13-W-S-1L-120V-MCT



WSC13-W-L-1L-120V-MCT

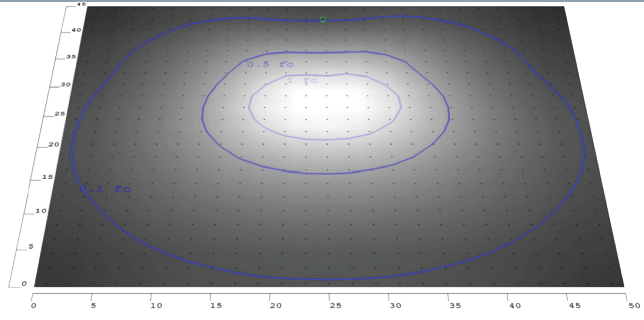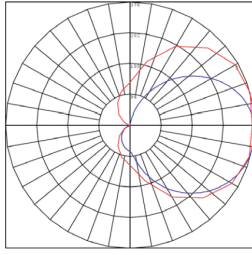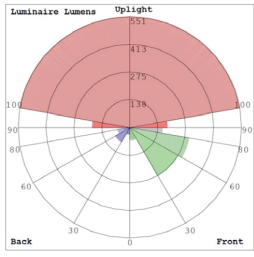

WSC13-W-S-1L-120V-MCT

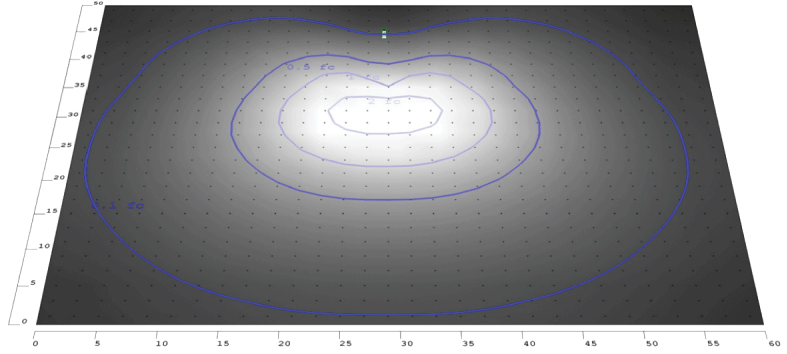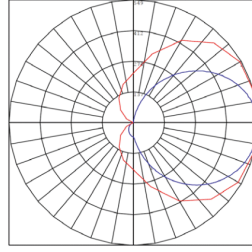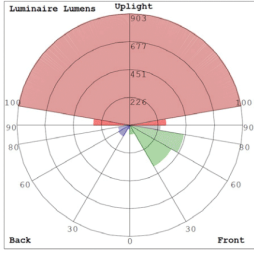

WSC13-W-L-1L-120V-MCT